

11:1 2020

AStata

Algebraic Statistics

MINIMAL EMBEDDING DIMENSIONS OF CONNECTED NEURAL CODES

RAFFAELLA MULAS AND NGOC M. TRAN



MINIMAL EMBEDDING DIMENSIONS OF CONNECTED NEURAL CODES

RAFFAELLA MULAS AND NGOC M. TRAN

A receptive field code is a recently proposed deterministic model of neural activity patterns in response to stimuli. The main question is to characterize the set of realizable codes, and their minimal embedding dimensions with respect to a given family of receptive fields. Here we answer both of these questions when the receptive fields are connected. In particular, we show that all connected codes are realizable in dimension at most three. To our knowledge, this is the first family of receptive field codes for which both the exact characterization and minimal embedding dimension are known.

1. Introduction

A *receptive field code* is a deterministic model of neural activity patterns in response to stimuli defined by Curto, Itskov, Veliz-Cuba and Youngs [5]. It consists of $n \in \mathbb{N}$ neurons, each neuron $i \in [n] = \{1, 2, \dots, n\}$ has a receptive field $U_i \subseteq \mathbb{R}^d$. Given a stimulus $x \in \mathbb{R}^d$, the neurons generate a codeword $\sigma(x) \in 2^{[n]}$ via

$$i \in \sigma(x) \iff x \in U_i. \tag{1}$$

A receptive field code $\mathcal{C}(\mathcal{U}) \subseteq 2^{[n]}$ is the set of all possible codewords generated from the collection of receptive fields $\mathcal{U} = (U_1, \dots, U_n)$. Without loss of generality, we can assume that every receptive field code includes the empty set ($\emptyset \in \mathcal{C}$), which is equivalent to assuming that $\bigcup_{i \in [n]} U_i \subsetneq \mathbb{R}^d$.

The *minimal embedding problem* is the following: given a code $\mathcal{C} \subseteq 2^{[n]}$ and a family $\mathcal{F} = (\mathcal{F}_d, d \geq 1)$, where \mathcal{F}_d is a collection of sets in \mathbb{R}^d , find the smallest d such that $\mathcal{C} = \mathcal{C}(\mathcal{U})$ for some $\mathcal{U} \subseteq \mathcal{F}_d$. Call this smallest d the minimal embedding dimension of the code \mathcal{C} with respect to the family \mathcal{F} , denoted $d^*(\mathcal{C}, \mathcal{F})$.

This paper focuses on *connected codes*. These are codes realizable by connected sets in \mathbb{R}^d , for some $d \in \mathbb{N}$, which are either all closed or all open, following the convention of [5]. Our main results completely characterize realizability and minimal embedding dimensions of connected codes. In particular, it is easy to check if a code is connected, and if it is, then the minimal embedding dimension is at most three. We state our main results below. Characterization of the minimal embedding dimension for the case $d^* = 2$ is given in terms of the graph of a family of connected sets \mathcal{U} (cf. Definition 9).

Proposition 1 (Realizability of connected codes). A code \mathcal{C} is connected if and only if for each $\sigma, \tau \in \mathcal{C}$ and for each $i \in \sigma \cap \tau$, there exists a sequence of distinct codewords $v_1, \dots, v_m \in \mathcal{C}$ such that:

- $\sigma = v_1$;
- $v_j \subseteq v_{j+1}$ or $v_{j+1} \subseteq v_j$, for every $j \in [m - 1]$;
- $v_m = \tau$;
- $i \in v_j$ for each $j \in [m]$.

MSC2010: 92B20, 05C65, 05C10.

Keywords: none, receptive field code, minimal embedding, realizability.

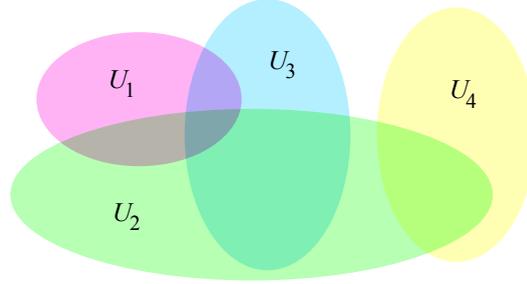


Figure 1. Four receptive fields generating the connected code $\mathcal{C}(\mathcal{U}) = \{\emptyset, 1, 2, 3, 4, 12, 13, 23, 24, 123\}$.

Theorem 2 (minimal embedding of connected codes). Suppose \mathcal{C} is a connected code. Let $d^*(\mathcal{C})$ denote its minimal embedding dimension with respect to the family of connected sets.

- $d^*(\mathcal{C}) = 1$ if and only if the sensor graph of \mathcal{C} is bipartite [22].
- Else, $d^*(\mathcal{C}) = 2$ if and only if there exists a realization $\mathcal{C}(\mathcal{U}) = \mathcal{C}$ by connected sets \mathcal{U} in dimension 3 such that the graph of \mathcal{U} is planar.
- Else, $d^*(\mathcal{C}) = 3$.

1.1. Related literature. The minimal embedding dimension $d^*(\cdot, \mathcal{F})$ and the family \mathcal{F} of receptive fields form a trade-off in measuring the complexity of the signal encoded by the neurons, and is thus of particular interest in receptive field coding. In the extreme case where \mathcal{F}_d is the collection of all sets in \mathbb{R}^d , then any code is realizable in dimension one [5].

Lemma 3. Let \mathcal{C} be a code on n neurons. For any $d \geq 1$, $\mathcal{C} = \mathcal{C}(\mathcal{U})$ for some sequence of sets \mathcal{U} in \mathbb{R}^d .

There has been a number of work on criteria for realizability and bounds for $d^*(\cdot, \mathcal{F})$ when the set \mathcal{F} consists of (open or closed) convex sets [3; 6; 4; 5; 10; 11; 12; 13; 15; 16; 17; 22; 18]. However, complete characterization and the exact minimal embedding dimension of convex codes remain a problem. Giusti and Itskov [12] found necessary conditions for a code to be realizable with open convex sets, and proved lower bounds on the embedding dimensions of such codes. In [3], Cruz, Giusti, Itskov and Kronholm proved that there exists a family of codes, called max-intersection-complete codes, that are both open convex and closed convex, and they gave an upper bound for their embedding dimension. To the best of our knowledge, connected codes form the first family of receptive field codes for which an intrinsic characterization and the exact embedding dimension is known. Furthermore, our proof gives explicit constructions for the code realization in each dimension.

There are biologically observed receptive fields which are connected but not convex. A prominent example are the center-surround fields in the ganglion cells on the retina [7; 1], which approximately have the shape of a torus in dimension two. In some other cases, such as the grid cells in entorhinal cortex, the receptive field of a single cell is neither convex nor connected [14]. Even amongst place cells of the hippocampus, which generally have a single convex receptive field, it is shown that certain cells have disconnected receptive fields [20]. Such a code with disconnected receptive fields may be realized as the

projection of a connected code in higher dimensions. In comparison, these codes cannot be realized as projections of convex codes in any dimension, because such projections preserve convexity. This gives us motivations for studying connected codes.

In dimension 1, connected codes equal convex codes. This was completely characterized by Rosen and Zhang [22] via the sensor graph and it is included in Theorem 2 for completeness. We do not define the sensor graph of a code here, but note that it is an intrinsic property of the code, independent of any realization \mathcal{U} .

Jefferies [16, Theorem 4.1] gave an alternative characterization of connected codes, which is distinct from our approach as it is formulated in terms of the links in the code, that we do not define here.

Receptive field codes are closely related to Euler diagrams, which found applications in information systems, statistics and logic [8; 21]. Since their main applications are in visualization, the literature on Euler diagrams focus exclusively on 2 and 3 dimensions. Translated to our setup, an Euler diagram in \mathbb{R}^3 is a collection $\mathcal{U} = (U_1, \dots, U_n)$ of closed, orientable surfaces embedded in \mathbb{R}^3 . An Euler diagram in \mathbb{R}^2 is a similar collection of closed curves embedded in \mathbb{R}^2 . A diagram description is a code \mathcal{C} such that $\emptyset \in \mathcal{C}$. The description of an Euler diagram \mathcal{U} is the code $\mathcal{C}(\mathcal{U}^\circ)$, where $\mathcal{U}^\circ := (U_1^\circ, \dots, U_n^\circ)$ consists of the relative interior of the sets U_i 's. The main problem in this literature is realizability: given a code \mathcal{C} , is there an Euler diagram \mathcal{U} such that $\mathcal{C} = \mathcal{C}(\mathcal{U}^\circ)$? Every code \mathcal{C} can be realized by an Euler diagram in dimension 2 [21], and by an Euler diagram in dimension 3 with connected sets U_i 's [9]. Note the crucial difference to receptive field codes: in an Euler diagram, codewords are generated by intersection of the relative interior of the U_i 's. In particular, all codes \mathcal{C} which fail the condition of Proposition 1 satisfy $\mathcal{C} = \mathcal{C}(\mathcal{U}^\circ)$ for some tuple of closed connected sets \mathcal{U} in \mathbb{R}^3 , but $\mathcal{C} \neq \mathcal{C}(\mathcal{U})$ for any tuple of closed connected sets in any dimension.

2. Proof of the main results

We shall first give one definition and state a lemma that can be found in [5] and that will be useful for the proof of our main results.

Definition 4. Let \mathcal{C} be a code on n neurons. We say that \mathcal{C} is realizable by an atom sequence $\mathcal{A} = (A_\sigma \subseteq \mathbb{R}^d, \sigma \subseteq [n])$ if $A_\sigma \neq \emptyset \iff \sigma \in \mathcal{C}$. In this case, write $\mathcal{C} = \mathcal{C}(\mathcal{A})$.

Lemma 5. Let \mathcal{C} be a code on n neurons. Then $\mathcal{C} = \mathcal{C}(\mathcal{A})$ if and only if $\mathcal{C} = \mathcal{C}(\mathcal{U})$, where

$$U_i = \bigcup_{i \in \sigma} A_\sigma, \quad (2)$$

or equivalently,

$$A_\sigma = \left(\bigcap_{i \in \sigma} U_i \right) \setminus \bigcup_{j \notin \sigma} U_j, \quad (3)$$

with the convention that $A_\emptyset = \mathbb{R}^d \setminus \bigcup_{i \in [n]} U_i$.

In other words, \mathcal{A} and \mathcal{U} determine each other.

Lemma 6. A code is realizable with closed connected sets in \mathbb{R}^d if and only if it is realizable with open connected sets in \mathbb{R}^d .

Proof. Given $\mathcal{C} = \mathcal{C}(\mathcal{U})$ where $\mathcal{U} = (U_1, \dots, U_n)$ is a family of closed connected sets in \mathbb{R}^d , we can always construct a family of open connected sets in \mathbb{R}^d , $\hat{\mathcal{U}} = (\hat{U}_1, \dots, \hat{U}_n)$, such that $U_i \subset \hat{U}_i$ for each $i \in [n]$. The fact that the U_i 's are contained in the \hat{U}_i 's implies that the old intersections are preserved and, furthermore, we can take the \hat{U}_i 's small enough to avoid the formation of new atoms. In this way we get a family of open connected sets in \mathbb{R}^d with $\mathcal{C}(\mathcal{U}) = \mathcal{C}(\hat{\mathcal{U}})$.

Vice versa, if $\mathcal{C} = \mathcal{C}(\mathcal{U})$ where $\mathcal{U} = (U_1, \dots, U_n)$ is given by open connected sets, we can let $\tilde{\mathcal{U}} = (\tilde{U}_1, \dots, \tilde{U}_n)$ be a family of closed connected sets in \mathbb{R}^d such that $\tilde{U}_i \subset U_i$ for each $i \in [n]$. The fact that the \tilde{U}_i 's are contained in the U_i 's implies that no new intersections are created, and we can take the \tilde{U}_i 's big enough to preserve the old atoms. In this way we get a family of closed connected sets in \mathbb{R}^d such that $\mathcal{C}(\mathcal{U}) = \mathcal{C}(\tilde{\mathcal{U}})$. \square

Example 7. As an example of how Lemma 6 works, let \mathcal{U} consists of three closed line segments in the plane meeting at a “T”, so that $\mathcal{C}(\mathcal{U}) = \{\emptyset, 1, 2, 3, 123\}$. Since we are in \mathbb{R}^2 , open sets \hat{U}_i 's containing the line segments U_i 's must be full-dimensional. Therefore we can take open rectangles \hat{U}_i 's containing the old U_i 's, such that they intersect all together but not pairwise. In this way we have that $\mathcal{C}(\mathcal{U}) = \mathcal{C}(\hat{\mathcal{U}})$.

Definition 8. We say that two sets $A, B \subset \mathbb{R}^d$ are adjacent if $A \cap B = \emptyset$ and either $\overline{A} \cap B \neq \emptyset$ or $A \cap \overline{B} \neq \emptyset$, where \overline{A} denotes the closure of A in the Euclidean topology.

Definition 9 (graph of a realization). Let $\mathcal{C} = \mathcal{C}(\mathcal{U})$ be a connected code with realization \mathcal{U} . Let \mathcal{A} be the atoms defined via \mathcal{U} in (3). The graph of \mathcal{U} , denoted $\mathbb{G}(\mathcal{U})$, is a graph with one vertex for every connected component of each atom A_σ with $\sigma \neq \emptyset$, and an edge for every pair of connected components of atoms that are adjacent.

Lemma 10. Let $\mathcal{C} = \mathcal{C}(\mathcal{U})$ be a connected code with realization \mathcal{U} in dimension d . If $\mathbb{G}(\mathcal{U})$ can be embedded in $\mathbb{R}^{d'}$, then \mathcal{C} can also be realized by connected sets in dimension d' .

Proof. Take an embedding of $\mathbb{G}(\mathcal{U})$ in $\mathbb{R}^{d'}$. Let \mathcal{A} be the atoms defined via \mathcal{U} in (3). Let $v_{\sigma j} \in \mathbb{R}^{d'}$ be the realization of the vertex of $\mathbb{G}(\mathcal{U})$ indexed by the j -th component of the atom A_σ . For each pair of nodes $v_{\sigma j}$ and $v_{\tau k}$, let $e_{\sigma j, \tau k} \subset \mathbb{R}^{d'}$ be the realization of the edge between these nodes. If they are not connected, define $e_{\sigma j, \tau k} = \emptyset$. Now define atoms \mathcal{A}' in $\mathbb{R}^{d'}$ via

$$A'_\sigma := \bigcup_j \left(v_{\sigma j} \cup \bigcup_{\tau k: \sigma \subset \tau} e_{\sigma j, \tau k} \right) \subset \mathbb{R}^{d'},$$

for $\sigma \in \mathcal{C} \setminus \{\emptyset\}$, and

$$A'_\emptyset := \mathbb{R}^{d'} \setminus \bigcup_{\sigma \in \mathcal{C} \setminus \{\emptyset\}} A'_\sigma.$$

It is easy to check that $\mathcal{C} = \mathcal{C}(\mathcal{A}')$, so \mathcal{C} is realizable in dimension d' , as needed. \square

2.1. Proof of Proposition 1. Let \mathcal{C} be a code on n neurons. By Lemma 3, $\mathcal{C} = \mathcal{C}(\mathcal{U}) = \mathcal{C}(\mathcal{A})$ for some $U_i, A_\sigma \subseteq \mathbb{R}^d, i \in [n], \sigma \subseteq [n]$. For each $i \in [n]$, U_i is connected if and only if for every $\sigma, \tau \subseteq [n]$ such that $i \in \sigma \cap \tau$, from each connected component C_σ of A_σ to each connected component C_τ of A_τ there is a path $C_\sigma = C_{v_1} \rightarrow C_{v_2} \dots \rightarrow C_{v_{m-1}} \rightarrow C_{v_m} = C_\tau$ in $\mathbb{G}(\mathcal{C}(\mathcal{U}))$, where $C_{v_j} \subseteq A_{v_j}$ is a connected component of A_{v_j} , such that $A_{v_j} \subseteq U_i$ for each $j \in [m]$. Note that, in order to have the receptive fields either all open or all closed, two connected components $C_\sigma \subseteq A_\sigma, C_\tau \subseteq A_\tau$ are allowed to be adjacent if and only if either $\sigma \subseteq \tau$ or $\tau \subseteq \sigma$. Hence U_i is allowed to be connected if and only if for every σ, τ such that $i \in \sigma \cap \tau$, there exists a sequence of distinct codewords $v_1, \dots, v_m \in \mathcal{C}$ such that:

- $\sigma = v_1$,
- either $v_j \subseteq v_{j+1}$ or $v_{j+1} \subseteq v_j$, for every $j \in [m-1]$,
- $v_m = \tau$ and
- $i \in v_j$ for each $j \in [m]$.

This proves the proposition. □

2.2. Proof of Theorem 2. We split the statement of Theorem 2 into two parts, and prove them separately. The first part, Proposition 11 states that the minimal embedding dimension for a connected code is at most 3. The second part, Proposition 13 gives a characterization for connected codes with $d^* = 2$. For the case $d^* = 1$, see [22, Proposition 1.9 and Theorem 3.4].

Proposition 11. Let \mathcal{C} be a connected code on n neurons. Then \mathcal{C} is realizable by connected sets in dimension 3.

Proof. For all $\sigma \in \mathcal{C} \setminus \{\emptyset\}$, choose disjoint balls $B_\sigma \subset \mathbb{R}^3$ and for all $\sigma, \tau \in \mathcal{C}$ such that $\sigma \subset \tau$, let $T_{\sigma, \tau} \subset \mathbb{R}^3$ be a tube that connects B_σ and B_τ . Since we are in \mathbb{R}^3 , the tubes can always be arranged so that they do not intersect with each other and this can be proved by induction the number of tubes. Given m disjoint tubes between $|\mathcal{C} \setminus \{\emptyset\}|$ balls, suppose we need to construct a tube $T_{\sigma, \tau}$ joining the balls B_σ and B_τ . Since the number m of existing tubes is finite, we can pick a point $s \in B_\sigma$ and a point $t \in B_\tau$ such that their projections in the $(0, 0, 1)$ direction is larger than that of any other point on the m existing tubes. Now join s and t by a tube $T_{\sigma, \tau}$ such that its projection onto the $(0, 0, 1)$ direction is larger than that of all other tubes. Thus, $T_{\sigma, \tau}$ is disjoint from the first m tubes, completing the induction argument. Now, let

$$A_\sigma := B_\sigma \cup \bigcup_{\sigma \subset \tau} T_{\sigma, \tau}$$

for $\sigma \in \mathcal{C} \setminus \{\emptyset\}$ and let

$$A_\emptyset := \mathbb{R}^3 \setminus \bigcup_{\sigma \in \mathcal{C} \setminus \{\emptyset\}} A_\sigma.$$

Then $\mathcal{C} = \mathcal{C}(\mathcal{A})$. Define \mathcal{U} from \mathcal{A} via (2). By Lemma 5, $\mathcal{C} = \mathcal{C}(\mathcal{U})$. By construction of \mathcal{A} and since we are assuming that \mathcal{C} satisfies Proposition 1, the U_i 's are connected. This completes the proof. □

Remark 12. The proof of Proposition 11 uses a classical technique that has been used for example also in [3, Lemma 2.2], [16, Lemma 4.4] and [9, Lemma 4.1].

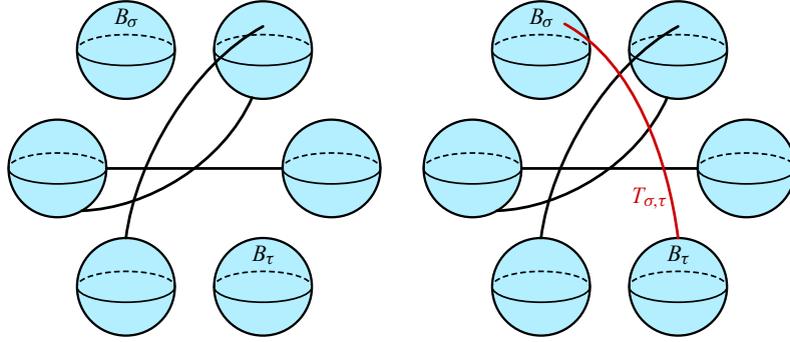


Figure 2. Illustration of the construction in Proposition 11. Given m disjoint tubes between $|\mathcal{C} \setminus \{\emptyset\}|$ balls (picture on the left), construct $T_{\sigma,\tau}$ such that its projection onto the $(0, 0, 1)$ direction is larger than that of all other tubes (right).

Proposition 13. Let \mathcal{C} be a connected code on n neurons. Then $d^*(\mathcal{C}) = 2$ if and only if there exists a realization $\mathcal{C} = \mathcal{C}(\mathcal{U})$ by connected sets in \mathbb{R}^3 such that $\mathbb{G}(\mathcal{U})$ is planar.

Proof. Suppose $d^*(\mathcal{C}) = 2$. Then there exists a realization $\mathcal{C} = \mathcal{C}(\mathcal{U})$ with \mathcal{U} a collection of connected sets in \mathbb{R}^2 . The graph of \mathcal{U} , $\mathbb{G}(\mathcal{U})$, is by construction also embedded in \mathbb{R}^2 . One can trivially embed a realization in \mathbb{R}^2 into \mathbb{R}^3 without changing the graph $\mathbb{G}(\mathcal{U})$, so we are done. Conversely, suppose that $\mathcal{C} = \mathcal{C}(\mathcal{U})$ for some \mathcal{U} in \mathbb{R}^3 such that $\mathbb{G}(\mathcal{U})$ is planar. By Lemma 10, \mathcal{C} is realizable in dimension 2. \square

We conclude our paper with two examples.

Example 14 (connected code with $d^* = 3$). Consider the following code

$$\mathcal{C} = \{\emptyset, 1, 2, 3, 4, 5, 12, 13, 14, 15, 23, 24, 25, 34, 35, 45\}. \quad (4)$$

This satisfies Proposition 1, so \mathcal{C} is a connected code. It's easy to see that every graph $\mathbb{G}(\mathcal{U})$ associated to this code must be a subdivision of the graph in Figure 3; i.e., if $\mathcal{C} = \mathcal{C}(\mathcal{U})$, then $\mathbb{G}(\mathcal{U})$ must be either the graph in in Figure 3 or it can be obtained from it by subdividing some of its edges into two new edges, which must be connected to a new vertex. This is due to the fact that \mathcal{C} is the code that contains exactly every $i \in [5]$ and every pair ij of distinct $i, j \in [5]$. This implies, by Kuratowski's theorem [2], that every graph associated to \mathcal{C} is not planar. By Theorem 2, \mathcal{C} has minimal embedding dimension 3.

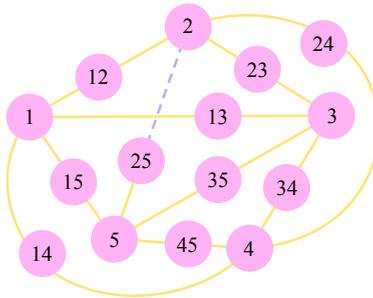


Figure 3. The graph of a connected realization of a code \mathcal{C} with $d^*(\mathcal{C}) = 3$ in Example 14.

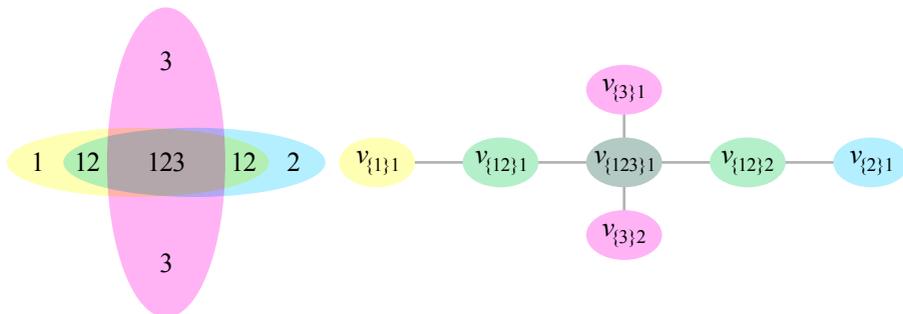


Figure 4. The realization of a connected code \mathcal{C} with $d^*(\mathcal{C}) = 2$ in Example 15 and its graph.

Example 15 (connected code with $d^* = 2$). Let $\mathcal{C} = \{\emptyset, 1, 2, 3, 12, 123\}$ be a code on 3 neurons. By Proposition 1, this code is connected. Figure 4 shows its realization by connected sets in \mathbb{R}^2 , and the corresponding graph. We claim that the minimal embedding dimension of this code is 2. One could verify by computing the sensor graph of \mathcal{C} . Alternatively, note that for the code to be realizable by connected sets, we must have $U_1 \cap U_2 \cap U_3 \neq \emptyset$ and U_i can not be contained in U_j for every $i, j \in [3], i \neq j$. This is clearly not possible in dimension 1.

3. Open directions

In practice, neural firing is stochastic. One could incorporate noise to the receptive field code by replacing the deterministic equation (1) with some parametrization of the firing probability $\mathbb{P}(i \in \sigma(x) | x \in U_i)$. To be well-defined, this model needs further specifications, such as the distribution of the signal on \mathbb{R}^d . In this formulation, the minimal embedding dimension is a difficult and poorly formed statistical problem. Furthermore, it is clear that the minimal embedding dimension depends heavily on such details. However, underlying such models the assumption that there is a set of true receptive fields \mathcal{U} . Knowing the minimal embedding dimension for the deterministic model ensures that the neuroscientists do not have excessively many parameters, which can lead to ill-defined estimation problems. From this view, Theorem 2 states that if the true receptive fields are only required to be connected, one can assume that they are in dimension 3.

Apart from connected and convex sets, there are many biologically relevant models for receptive fields. Finding the minimal embedding dimension of receptive field codes realizable by any given family is an interesting and challenging problem. To be concrete, we propose another simple family motivated by observations from neuroscience. In experiments, one often encounter a group of neurons which all have the same receptive field up to translation, such as the retinal ganglion cells, head direction cells [7], place cells and grid cells [19; 14]. This corresponds to the case where \mathcal{F}_d consists of all possible translations of some set $S \subset \mathbb{R}^d$. We call this the *shift* code. Thus, a concrete open problem is: which shift codes can be realized, and what would be their minimal embedding dimensions?

Acknowledgments

The authors thank the anonymous referee for constructive comments.

References

- [1] M. R. Blackburn, “A simple computational model of center-surround receptive fields in the retina”, technical report ADA264723, Defense Technical Information Center, 1993, <https://apps.dtic.mil/sti/citations/ADA264723>.
- [2] J. A. Bondy and U. S. R. Murty, *Graph theory*, Graduate Texts in Mathematics **244**, Springer, 2008.
- [3] J. Cruz, C. Giusti, V. Itskov, and B. Kronholm, “On open and closed convex codes”, *Discrete Comput. Geom.* **61**:2 (2019), 247–270.
- [4] C. Curto, “What can topology tell us about the neural code?”, *Bull. Amer. Math. Soc. (N.S.)* **54**:1 (2017), 63–78.
- [5] C. Curto, V. Itskov, A. Veliz-Cuba, and N. Youngs, “The neural ring: an algebraic tool for analyzing the intrinsic structure of neural codes”, *Bull. Math. Biol.* **75**:9 (2013), 1571–1611.
- [6] C. Curto, E. Gross, J. Jeffries, K. Morrison, M. Omar, Z. Rosen, A. Shiu, and N. Youngs, “What makes a neural code convex?”, *SIAM J. Appl. Algebra Geom.* **1**:1 (2017), 222–238.
- [7] P. Dayan and L. F. Abbott, *Theoretical neuroscience: computational and mathematical modeling of neural systems*, MIT Press, Cambridge, MA, 2001.
- [8] J. Flower, A. Fish, and J. Howse, “Euler diagram generation”, *J. Vis. Lang. Comput.* **19**:6 (2008), 675–694.
- [9] J. Flower, G. Stapleton, and P. Rodgers, “On the drawability of 3D Venn and Euler diagrams”, *J. Vis. Lang. Comput.* **25**:3 (2014), 186–209.
- [10] M. K. Franke and M. Hoch, “Investigating an algebraic signature for max intersection-complete codes”, REU report, Texas A&M University, 2017, http://see-math.math.tamu.edu/ugs/research/REU/results/REU_2017/Hoch.pdf.
- [11] M. Franke and S. Muthiah, “Every binary code can be realized by convex sets”, *Adv. in Appl. Math.* **99** (2018), 83–93.
- [12] C. Giusti and V. Itskov, “A no-go theorem for one-layer feedforward networks”, *Neural Comput.* **26**:11 (2014), 2527–2540.
- [13] E. Gross, N. Obatake, and N. Youngs, “Neural ideals and stimulus space visualization”, *Adv. in Appl. Math.* **95** (2018), 65–95.
- [14] T. Hafting, M. Fyhn, S. Molden, M.-B. Moser, and E. I. Moser, “Microstructure of a spatial map in the entorhinal cortex”, *Nature* **436** (2005), 801–806.
- [15] M. Hoch, S. Muthiah, and N. Obatake, “On the identification of k -inductively pierced codes using toric ideals”, preprint, 2018. arXiv 1807.02390
- [16] R. A. Jeffs, *Convexity of neural codes*, undergraduate thesis, Harvey Mudd College, 2016, https://scholarship.claremont.edu/hmc_theses/87/.
- [17] R. A. Jeffs, M. Omar, and N. Youngs, “Homomorphisms preserving neural ideals”, *J. Pure Appl. Algebra* **222**:11 (2018), 3470–3482.
- [18] C. Lienkaemper, A. Shiu, and Z. Woodstock, “Obstructions to convexity in neural codes”, *Adv. in Appl. Math.* **85** (2017), 31–59.
- [19] J. O’Keefe, “Place units in the hippocampus of the freely moving rat”, *Exp. Neurol.* **51**:1 (1976), 78–109.
- [20] E. Park, D. Dvorak, and A. A. Fenton, “Ensemble place codes in hippocampus: CA1, CA3, and dentate gyrus place cells have multiple place fields in large environments”, *PLOS ONE* **6**:7 (2011), art. id. e22349.
- [21] P. Rodgers, “A survey of Euler diagrams”, *J. Vis. Lang. Comput.* **25**:3 (2014), 134–155.
- [22] Z. Rosen and Y. X. Zhang, “Convex neural codes in dimension 1”, preprint, 2017. arXiv 1702.06907

Received 2017-10-12. Revised 2018-07-13. Accepted 2019-02-18.

RAFFAELLA MULAS: raffaella.mulas@gmail.com
 MPI MiS-Leipzig, Germany

NGOC M. TRAN: ntran@math.utexas.edu
 University of Texas at Austin, Austin, TX, United States

and

Hausdorff Center for Mathematics, Bonn, Germany



msp.org/astat

MANAGING EDITORS

Thomas Kahle Otto-von-Guericke-Universität Magdeburg, Germany
Sonja Petrovic Illinois Institute of Technology, United States

ADVISORY BOARD

Mathias Drton Technical University of Munich, Germany
Peter McCullagh University of Chicago, United States
Giorgio Ottaviani University of Florence, Italy
Bernd Sturmfels University of California, Berkeley, and Max Planck Institute, Leipzig
Akimichi Takemura University of Tokyo, Japan

EDITORIAL BOARD

Marta Casanellas Universitat Politècnica de Catalunya, Spain
Alexander Engström Aalto University, Finland
Hisayuki Hara Doshisha University, Japan
Jason Morton Pennsylvania State University, United States
Uwe Nagel University of Kentucky, United States
Fabio Rapallo Università del Piemonte Orientale, Italy
Eva Riccomagno Università degli Studi di Genova, Italy
Yuguo Chen University of Illinois, Urbana-Champaign, United States
Caroline Uhler Massachusetts Institute of Technology, United States
Ruriko Yoshida Naval Postgraduate School, United States
Josephine Yu Georgia Institute of Technology, United States
Piotr Zwiernik Universitat Pompeu Fabra, Barcelona, Spain

PRODUCTION

Silvio Levy (Scientific Editor)
production@msp.org

See inside back cover or msp.org/astat for submission instructions.

Algebraic Statistics (ISSN 2693-3004 electronic, 2693-2997 printed) at Mathematical Sciences Publishers, 798 Evans Hall #3840, c/o University of California, Berkeley, CA 94720-3840 is published continuously online. Periodical rate postage paid at Berkeley, CA 94704, and additional mailing offices.

AStat peer review and production are managed by EditFlow[®] from MSP.


PUBLISHED BY
 **mathematical sciences publishers**
nonprofit scientific publishing
<http://msp.org/>
© 2020 Mathematical Sciences Publishers

Algebraic Statistics

2020

11:1

Editorial: A new beginning	1
THOMAS KAHLE and SONJA PETROVIĆ	
Maximum likelihood estimation of toric Fano varieties	5
CARLOS AMÉNDOLA, DIMITRA KOSTA and KAIE KUBJAS	
Estimating linear covariance models with numerical nonlinear algebra	31
BERND STURMFELS, SASCHA TIMME and PIOTR ZWIERNIK	
Expected value of the one-dimensional earth mover's distance	53
REBECCA BOURN and JEB F. WILLENBRING	
Inferring properties of probability kernels from the pairs of variables they involve	79
LUIGI BURIGANA and MICHELE VICOVARO	
Minimal embedding dimensions of connected neural codes	99
RAFFAELLA MULAS and NGOC M. TRAN	



2693-2997(2020)11:1;1-S